



Series RF-DBI **Rubber Flex In-Line Duckbill Check Valve**

Cla-Val Series RF-DBI Duckbill In-Line Flanged Style Check Valves are for pressurized pipeline applications where it is inserted between pipe flanges. Cla-Val Series RF-DBI Duckbill In-Line Flanged Style Check Valves have an integral rubber flange for attaching directly between flanged-end pipe connections. A variety of elastomers allow DBI valves to be used with many fluids. When ordering, specify Model RF-DBI, pipe ID size, flange drilling, and add first letter of elastomer material. IE: 4"-DBI-N (N for Neoprene).





Note 1:


Dimensions are for clearance purposes only. Actual product dimensions may vary based upon specific application requirements. Note 2:

Larger sizes are available, contact local office for pricing.



Model RF-DBI

Size ID	2	3	4	5	6	8	10	12	14	16	18	20	24
ID	1 1/4	2 1/4	3	4	5	6 5/8	8 5/8	10	11 1/2	13 1/2	15 1/4	17	20 1/2
F/F	6	7 1/2	13	14 1/2	16	18	20	21	22	24	27	30	33
Н	1/2	1/2	3/4	3/4	3/4	3/4	3/4	1	1	1	1	1 3/16	1 3/8
W	1 7/8	2 7/8	3 7/8	4 7/8	5 7/8	7 5/8	9 5/8	11 7/8	12 3/4	14 3/4	16 3/4	18 3/4	22 3/4
Wt. Lbs	5	11	15	17	21	25	37	59	75	124	205	315	400

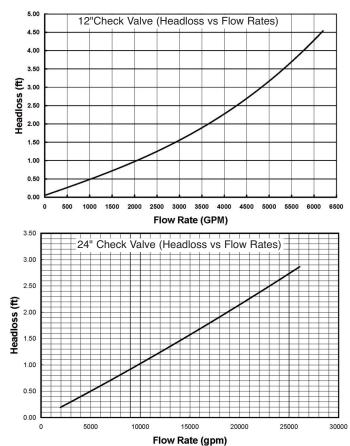

Elastomer Selection Guide

Ethylene Propylene Rubber

Most effective for applications involving waste or diluted acids.

Viton™

Resists solvents, halogenated hydrocarbons, oxvgen, weather, ozone, oils and chemicals.

Buna N[®]

Resistant to kerosene, moderate chemicals, fats, oils, grease and many hydrocarbons.

Natural Rubber

Good abrasion resistance, tensile strength and resiliency. Also suitable for applications with organic acids, alcohols, ketones and most moderate chemicals.

Hvpalon[™]

Resists strong acids and bases, ozone, weathering, heat and oxidizing chemicals.

Butyl

Good resistance to animal, vegetable fats, strong oxidizing chemicals, oils, heat and greases.

Neoprene

General resistant to oil, grease, moderate chemicals, fats, hydrocarbons, ozone. and barnacle growth.

Order Information	Flow Rate (gpm)	Line Pressure	Back Pressure
Minimum			
Maximum			



1701 Placentia Ave • Costa Mesa CA 92627 • Phone: 949-722-4800 • Fax: 949-548-5441 • E-mail: info@cla-val.com • www.cla-val.com ©Copyright Cla-Val 2021 • Printed in USA • Specifications subject to change without notice. E-RF-DBI (R-02/2021)

Sample Flow Rate vs

Headloss Graphs. Other size charts available

upon request.

Based on flow testing at

Utah State University