




Series 584

Flex-Check Valve



**Model 584BF Backflushing
Flex-Check Valve - Sizes 3" - 36"**

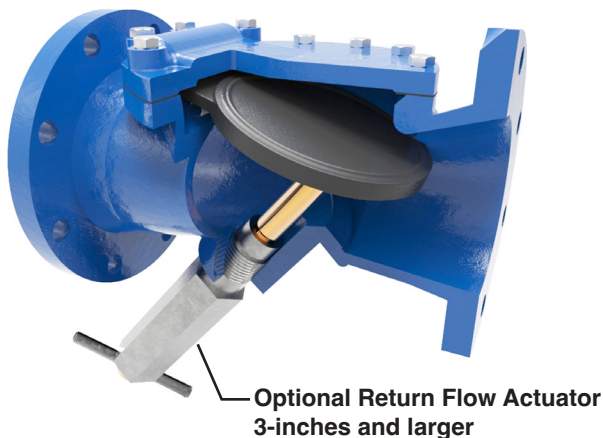


- Full Pipe Size Flow Area
- Drip Tight Seating
- Non-Slam Closure
- NSF/ANSI 61 Fusion Bonded Epoxy Coating
- Available with Integral Surge Protector, Position Indicator and Backflushing features
- Sizes 2 through 36 inches available
- Meets the Federal Mandate Limiting Lead in Drinking Water

The Cla-Val Series 584 Flex-Check Valve has a full-flow area body with integral seat at 45° angle to reduce head loss. This minimizes disc travel to 35° degrees for improved non-slam check action and for reliable vertical up flow operation even on slurry applications. Body and Cover are NSF/ANSI 61 fusion bonded epoxy coated for long service life on potable and non-potable systems. Unique one-piece steel and nylon reinforced BUNA-N rubber flapper flexes to eliminate traditional metal hinge problems. During system flowing conditions the flapper flexes up to the open position allowing unrestricted flow through the valve. When system reverse flow conditions occur the flapper flexes down to the closed position for drop-tight seal preventing reverse flow. The flapper reliability is test-proven to over one million cycles. The optional Return Flow Actuator offers manual opening for pump priming, back flushing, draining lines, or system testing needs and is easy to field install.



Typical Applications

- Water Systems
- Industrial Waste
- Erosive Services
- Acid Lines
- Light Slurries
- Leaching Lines
- Brine & Salt Water Systems
- Raw Sewage
- Chemical Lines
- Ash Service
- Tailings Systems
- Corrosive Services
- Scrubbers

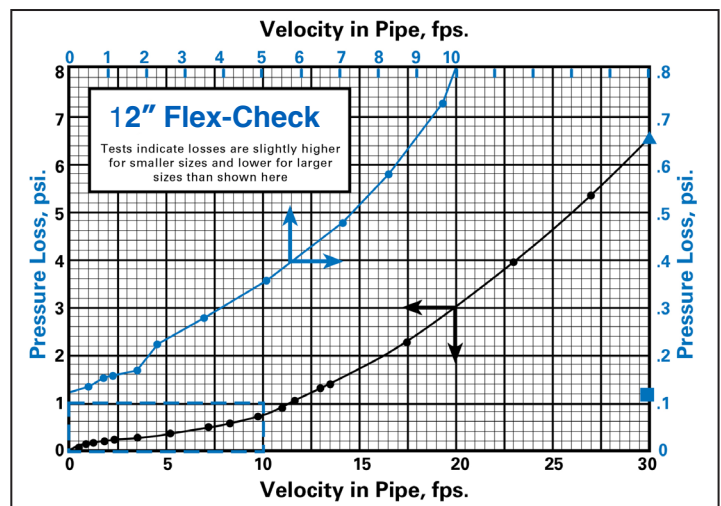

Series 584 Flex-Check Valve Technical Data

Size (inches)	A	C	D	E	F	G	# of Bolts	Bolt Hole Size	Weight (lbs.)
2	8.00	0.69	5.18	4.75	6.00	3.38	4	0.625	19
2.5	8.50	0.75	5.18	5.50	7.00	3.38	4	0.625	20
3	9.50	0.81	7.50	6.00	7.50	5.13	4	0.625	21
4	11.50	0.75	8.25	7.50	9.00	5.75	8	0.625	38
6	14.00	0.75	11.13	9.50	11.00	6.88	8	0.75	100
8	19.50	0.88	16.00	11.75	13.50	8.38	8	0.75	185
10	24.50	1.18	21.00	14.25	16.00	10.75	12	0.88	335
12	27.50	1.25	24.00	17.00	19.00	12.50	12	0.88	475
14	31.00	1.38	23.25	18.75	21.00	13.00	12	1.00	640
16	36.00	1.43	25.25	21.25	23.50	14.25	16	1.00	950
18	40.00	1.56	28.25	22.75	25.00	15.25	16	1.12	1250
20	40.00	1.68	30.63	25.00	27.50	16.88	20	1.12	1550
24	48.00	1.88	36.00	29.50	32.00	19.25	20	1.25	2000
36	63.00	2.38	55.00	42.75	46.00	27.38	32	1.50	7000

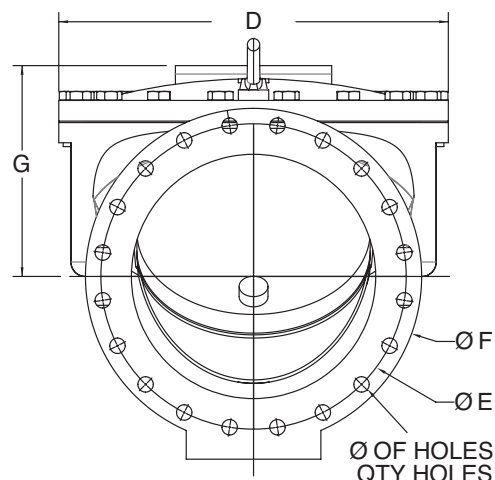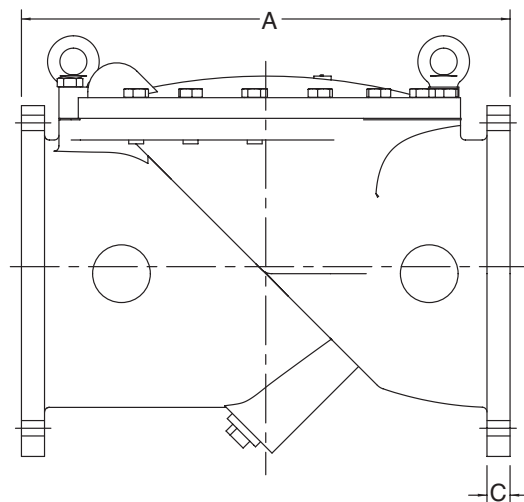

Valve Materials of Construction

Valve Body & Cover: Ductile Iron - ASTM 536 65-45-12

Flapper Options: BUNA-N, Neoprene, Hypalon & Viton™

Lining Options: Natural Rubber, Neoprene & Hypalon *

* Operating Temperatures for Liner & Flapper Materials	
Material	°F
BUNA-N	- 70 to 250
Rubber	- 40 to 180
Neoprene	- 20 to 250
Hypalon	- 40 to 195
Viton™	- 40 to 450
Other Liner & Flapper materials available	

Standard Rubber Hardness Durometer of Flapper to be Determined by Operating Pressure		
Valve Size	Operating Pressure, PSI	
	10 to 80	80 to 250
2-inches to 8-inches	45 Durometer	70 Durometer
10-inches to 36-inches	70 Durometer	



E-584 Flex-Check Valve (R-11/2024)

CLA-VAL

1701 Placentia Avenue • Costa Mesa, CA 92627
800-942-6326 • www.cla-val.com • info@cla-val.com

CLA-VAL CANADA

4687 Christie Drive
Beamsville, Ontario
Canada L0R 1B4
Phone: 905-563-4963
Fax: 905-563-4040
E-mail sales@cla-val.ca

CLA-VAL EUROPE

Chemin des Mésanges 1
CH-1032 Romanel/
Lausanne, Switzerland
Phone: 41-21-643-15-55
E-mail: info@cla-val.ch

CLA-VAL UK

Dainton House, Goods Station Road
Tunbridge Wells
Kent TN11 2 DH England
Phone: 44-1892-514-400
E-mail: info@cla-val.co.uk

CLA-VAL FRANCE

Porte du Grand Lyon 1
ZAC du Champ du Périer
France - 01700 Neyron
Phone: 33-4-72-25-92-93
E-mail: info@cla-val.ch

©COPYRIGHT CLA-VAL 2021 Printed in USA Specifications subject to change without notice.