




Model 610-09


COMBINATION ALTITUDE AND BACK PRESSURE VALVE

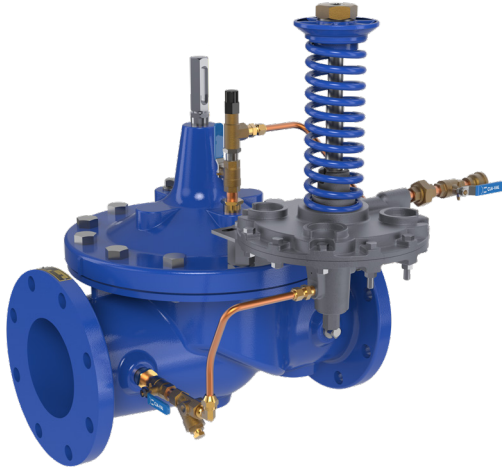

- Accurate and Repeatable Level Control
- Prevents Low Supply Pressure When Filling
- Drip Tight Positive Shut-Off
- Reliable Hydraulic Operation
- Easily Adjustable Controls

The Cla-Val Model 610-09 Combination Altitude and Back Pressure Valve controls the high water level in reservoirs without the need for floats or other devices. The valve modulates to maintain upstream pressure within close limits to prevent over drawing system supply while filling reservoir. When the shut-off point of the hydraulic pilot control is reached, the valve closes smoothly without surges. This valve is designed for one-way flow only.

Model 610-09 Valve is hydraulically-operated and pilot-controlled for optimum automatic level and pressure control. The level pilot control operates on a differential in forces between spring load and reservoir head level. When force of spring is overcome by force of reservoir head, the pilot shifts and closes main valve. Desired high water level is set by adjusting spring force. The level pilot control measures the reservoir head through a customer supplied separate sensing line* connected directly to reservoir. The pressure sustaining pilot control senses upstream system pressure and modulates the main valve more open on a rise in pressure to maintain a minimum inlet pressure when filling reservoir. The valve can also be furnished with auxiliary controls to meet the need for additional functions, such as: rate of flow control, pressure reduction, solenoid override, etc. If the check feature option is added and a pressure reversal occurs, reservoir pressure is admitted into main valve cover chamber and valve closes to prevent return flow.

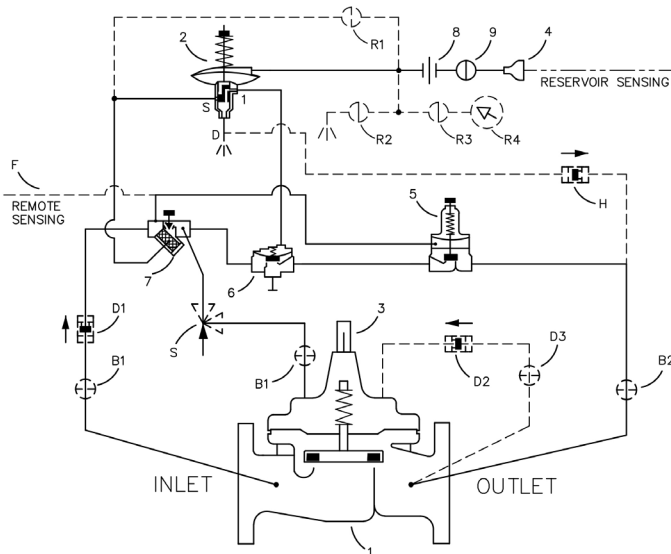

Schematic Diagram	
Item	Description
1	100-20 Hytrol Main Valve
2	CDS Altitude Control
3	X101D Valve Position Indicator
4	Bell Reducer
5	CRL/CRL-60 Pressure Relief Valve
6	100-01 Hytrol (Reverse Flow)
7	X42N-3 Strainer


Optional Features	
Item	Description
B	CK2 Isolation Valve
D	Check Valve with Isolation Valve
F	Remote Pilot Sensing
R	Reservoir Gauge with Tester
S	CV Flow Control (Opening)

Typical Applications

Used on reservoirs where water is withdrawn through a separate line or through a bypass equipped with a check valve. Valve closes at the desired high water level and reopens for filling when reservoir head lowers below the shut off level. Valve controls minimum supply pressure to keep from overdrawing supply while filling reservoir. Water in excess of system pressure flows to reservoir at controlled rate. For more information see data sheet E-CDS.

Note: The reservoir pressure sensing line should be 3/4" minimum I.D. installed with a 2" slope from the valve to the reservoir to avoid air pockets.

Note: We recommend protecting tubing and valve from freezing temperatures.

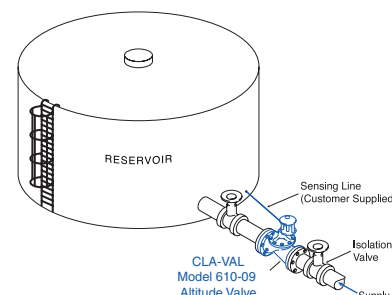

Model 610-09 (Uses Main Valve Model 100-20)

Recommended Maximum Pressure - psi

Pressure Ratings

Valve Body & Cover		Pressure Class		
		Flanged		
Grade	Material	ANSI Standards*	150 Class	300 Class
ASTM A536	Ductile Iron	B16.42	250	400
ASTM A216-WCB	Cast Steel	B16.5	285	400
UNS 87850	Bronze	B16.24	225	400



Note:
 * ANSI standards are for flange dimensions only.
 Flanged valves are available faced but not drilled.
 Valves for higher pressure are available; consult factory for details

Materials

Component	Standard Material Combinations		
Body & Cover	Ductile Iron	Cast Steel	Bronze
Available Sizes	3" - 48" 80 - 1200 mm	3" - 16" 80 - 400 mm	3" - 16" 80 - 400 mm
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze
Trim: Disc Guide, Seat & Cover Bearing	Bronze is Standard Stainless Steel is Optional		
Disc	Buna-N® Rubber		
Diaphragm	Nylon Reinforced Buna-N® Rubber		
Stem, Nut & Spring	Stainless Steel		

For material options not listed, consult factory. Cla-Val manufactures valves in more than 50 different alloys.

Cover Capacity Liquid Volume Displaced from Diaphragm Chamber When Valve Opens or Closes	Valve Size	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	36"
	Displacement (in gallons)	.032	.080	.169	.531	1.26	2.51	2.51	4.00	4.00	9.57	9.57	29.00

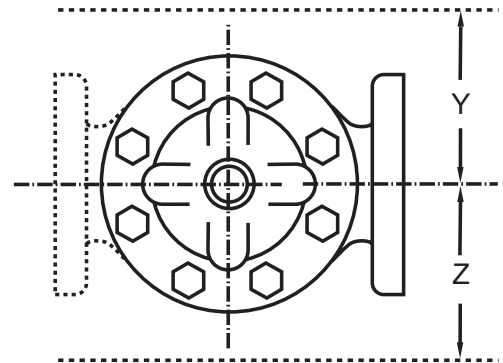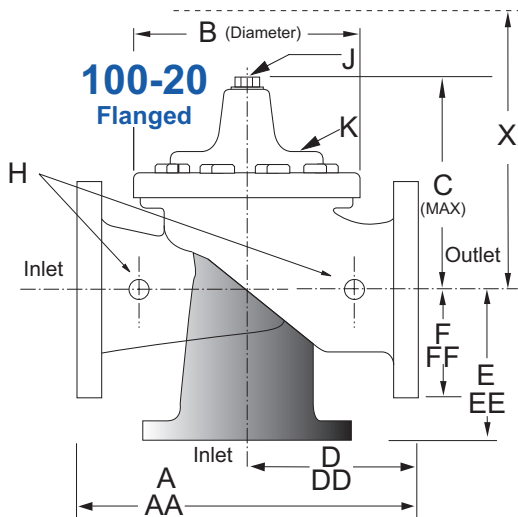




In Inches

Model 610-09 Dimensions

Valve Size (Inches)	3	4	6	8	10	12	14	16	18	20	24	30	36	48
A 150 ANSI	10.25	13.88	17.75	21.38	26.00	30.00	34.25	35.00	42.12	48.00	48.00	63.25	65.00	88.0
AA 300 ANSI	11.00	14.50	18.62	22.38	27.38	31.50	35.75	36.62	43.63	49.62	49.75	63.75	67.00	90.62
B Diameter	6.62	9.12	11.50	15.75	20.00	23.62	27.47	28.00	35.44	35.44	35.44	53.19	56.00	66.00
C Maximum	7.00	8.62	11.62	15.00	17.88	21.00	20.88	25.75	25.00	31.50	31.50	43.94	54.75	59.00
D 150 ANSI	—	6.94	8.88	10.69	12.75	14.94	—	—	20.93	21.06	—	—	—	—
DD 300 ANSI	—	7.25	9.38	11.19	—	—	—	—	—	—	—	—	—	—
E 150 ANSI	—	5.50	6.75	7.25	8.06	8.68	—	—	15.81	15.94	—	—	—	—
EE 300 ANSI	—	5.81	7.25	7.75	—	—	—	—	—	—	—	—	—	—
F 150 ANSI	3.75	4.50	5.50	6.75	8.00	9.50	11.00	11.75	15.88	14.56	17.00	19.88	25.50	34.00
FF 300 ANSI	4.12	5.00	6.25	7.50	8.75	10.25	12.00	12.75	15.88	16.06	19.00	22.00	27.50	38.50
H NPT Body Tapping	0.375	0.50	0.75	0.75	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	2.00	2.00
J NPT Cover Center Plug	0.50	0.50	0.75	0.75	1.00	1.00	1.25	1.25	2.00	2.00	2.00	1.00	2.00	2.00
K NPT Cover Tapping	0.375	0.50	0.75	0.75	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	2.00	2.00
Stem Travel	0.60	0.80	1.10	1.70	2.30	2.80	3.40	4.50	4.50	4.50	6.50	7.50	7.50	8.50
Approx. Ship Weight (lbs)	45	85	195	330	625	900	1250	1380	2365	2551	2733	6500	8545	13100
Approx. X Pilot System	13	15	27	30	33	36	36	41	40	46	55	68	79	86
Approx. Y Pilot System	10	11	18	20	22	24	26	26	30	30	30	39	40	47
Approx. Z Pilot System	10	11	18	20	22	24	26	26	30	30	30	39	42	49

Model 610-09 Metric Dimensions (Uses Main Valve Model 100-20)

Model 100-20 Reduced Port Hytrol Main Valve

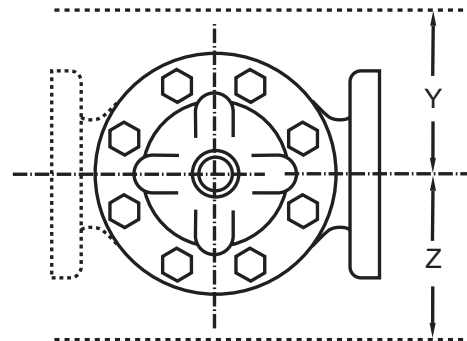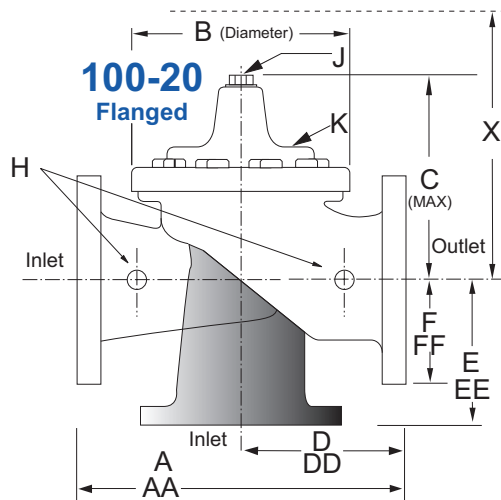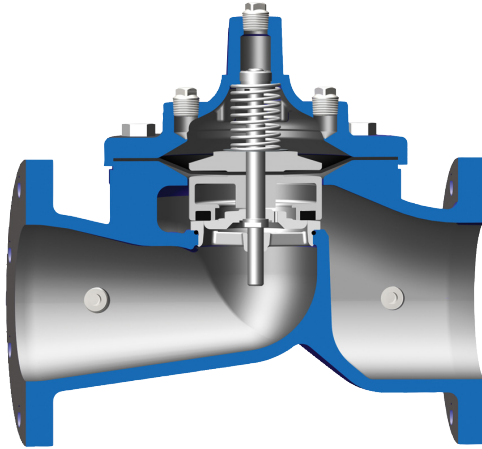

In mm

Model 610-09 Dimensions

Valve Size (mm)	80	100	150	200	250	300	350	400	450	500	600	750	900	1200
A 150 ANSI	260	353	451	543	660	762	870	889	1070	1219	1219	1607	1651	2235
AA 300 ANSI	279	368	473	568	695	800	908	930	1108	1260	1263	1619	1702	2302
B Diameter	168	232	292	400	508	600	698	711	900	900	900	1351	1422	1676
C Maximum	178	219	295	381	454	533	530	654	635	800	800	1116	1391	1499
D 150 ANSI	—	176	226	272	324	380	—	—	532	535	—	—	—	—
DD 300 ANSI	—	184	238	284	—	—	—	—	—	—	—	—	—	—
E 150 ANSI	—	140	171	184	205	349	—	—	402	405	—	—	—	—
EE 300 ANSI	—	148	184	197	—	—	—	—	—	—	—	—	—	—
F 150 ANSI	95	114	140	171	203	241	279	289	403	370	432	505	648	864
FF 300 ANSI	105	127	159	191	222	260	305	324	403	408	483	559	699	978
H NPT Body Tapping	0.375	0.50	0.75	0.75	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	2.00	2.00
J NPT Cover Center Plug	0.50	0.50	0.75	0.75	1.00	1.00	1.25	1.25	2.00	2.00	2.00	1.00	2.00	2.00
K NPT Cover Tapping	0.375	0.50	0.75	0.75	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	2.00	2.00
Stem Travel	15	20	28	43	58	71	86	86	114	114	114	165	191	216
Approx. Ship Weight (kgs)	20	39	89	150	284	409	568	627	681	1157	1249	2951	3876	5942
Approx. X Pilot System	331	381	686	762	839	915	915	1042	1016	1169	1397	1728	2007	2185
Approx. Y Pilot System	254	280	458	508	559	610	661	661	762	762	762	991	1016	1194
Approx. Z Pilot System	254	280	458	508	559	610	661	661	762	762	762	991	1067	1245

610-09 Valve Selection	100-20 Pattern: Globe (G), Angle (A), End Connections: Flanged (F) Indicate Available Sizes															
	Inches	3	4	6	8	10	12	14	16	18	20	24	30	36	42	48
	mm	80	100	150	200	250	300	350	400	450	500	600	750	900	1000	1200
Main Valve 100-20	Pattern	G,	G, A	G, A	G, A	G	G	G	G	G	G	G	G	G	G	G
	End Detail	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
Suggested Flow (gpm)	Maximum	260	580	1025	2300	4100	6400	9230	9230	16500	16500	16500	28000	33500	33500	33500
Suggested Flow (Liters/Sec)	Maximum	16	37	65	145	258	403	581	581	1040	1040	1040	1764	2115	2115	2115
100-20 Series is the reduced internal port size version of the 100-01 Series.																

Pilot System Specifications



CDS

Adjustment Ranges

5 - 40 ft.
30 - 80 ft.
70 - 120 ft.
110 - 160 ft.
150 - 200 ft.



CRL

Adjustment Ranges

0 to 75 psi Max.
20 to 200 psi*
100 to 300 psi

*Supplied unless otherwise specified Other ranges available, please consult factory



CRL-60

Adjustment Ranges

0 to 75 psi
20 to 75 psi (1" size only)
20 to 105 psi (1/2" size only)
20 to 200 psi
20 to 400 psi (1" size only)
100 to 300 psi

Temperature

Water: to 180° F

If flowing line pressure is less than 10 psi, consult factory for full details. If inlet pressure is above 150 psi, consult factory for recommendations.

Materials

Standard Pilot System Materials

Pilot Control: Low Lead Bronze
Trim: Stainless Steel Type 303
Rubber: Buna-N® Synthetic Rubber

Optional Pilot System Materials

Pilot Systems are available with optional Aluminum, Stainless Steel, or Monel materials. Valve position indicator is standard

When Ordering, Please Specify

- Catalog No. 610-09
- Valve Size
- Pattern - Globe or Angle
- Pressure Class
- Threaded or Flanged
- Materials Desired
- Adjustment Range
- Desired Options
- When Vertically Installed



Scan the QR Code to access our full range of altitude valves.