




Model 690-48

PRESSURE REDUCING VALVE WITH LOW FLOW BY-PASS

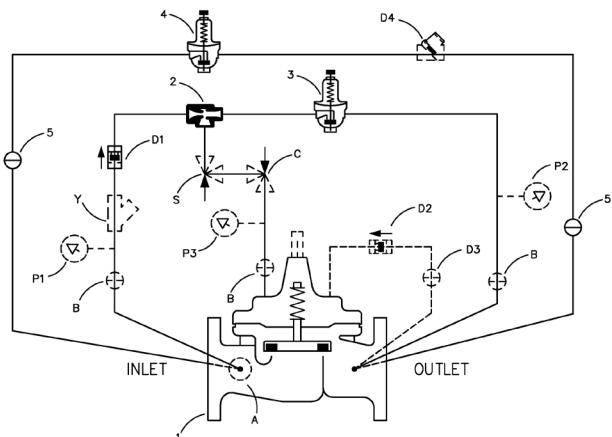


Schematic Diagram	
Item	Description
1	100-20 Hytrol Main Valve
2	X47A Ejector
3	CRD Pressure Reducing Control
4	CRD-L Pressure Reducing Valve
5	CK2 Isolation Valve

*The closing speed control (optional) on this valve should always be open at least three (3) turns off its seat.

Optional Features	
Item	Description
A	X46A Flow Clean Strainer
B	CK2 Isolation Valve
C	CV Flow Control (Closing)*
D	Check Valves with Isolation Valve
P	X141 Pressure Gauge
S	CV Flow Control (Opening)
V	X101D Valve Position Indicator
Y	X43 "Y" Strainer

Typical Applications

This valve has the flexibility to be installed in a distribution system where the demand varies over a wide range. This frequently occurs in industrial, residential, educational, high-rise buildings and other applications. Another important feature of the valve is its space efficient configuration, allowing easy installation and maintenance. A downstream pressure relief valve is also recommended for this type of application.

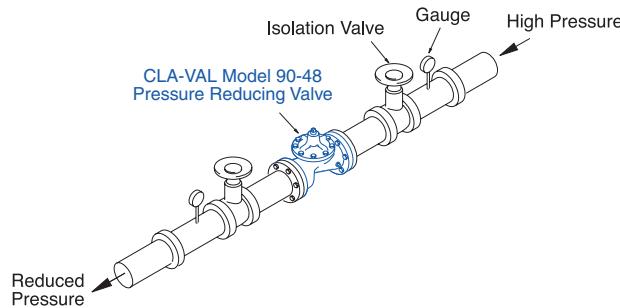

Model 690-48 (Uses 100-20 Hytrol Main Valve)

Recommended Maximum Pressure - psi

Pressure Ratings

Valve Body & Cover		Pressure Class				
		Flanged		Grooved	Threaded	
Grade	Material	ANSI Standards*	150 Class	300 Class	300 Class	End‡ Details
ASTM A536	Ductile Iron	B16.42	250	400	400	400
ASTM A216-WCB	Cast Steel	B16.5	285	400	400	400
UNS 87850	Bronze	B16.24	225	400	400	400



Note:

- * ANSI standards are for flange dimensions only.
- Flanged valves are available faced but not drilled.
- ‡ End Details machined to ANSI B2.1 specifications.
- Valves for higher pressure are available; consult factory for details.

Materials

Component	Standard Material Combinations		
	Ductile Iron	Cast Steel	Bronze
Body & Cover	3" - 10" 80 - 250 mm	3" - 10" 80 - 250 mm	3" - 10" 80 - 250 mm
Disc Retainer & Diaphragm Washer	Cast Iron	Cast Steel	Bronze
Trim: Disc Guide, Seat & Cover Bearing	Bronze is Standard Stainless Steel is Optional		
Disc	Buna-N® Rubber		
Diaphragm	Nylon Reinforced Buna-N® Rubber		
Stem, Nut & Spring	Stainless Steel		

For material options not listed, consult factory. Cla-Val manufactures valves in more than 50 different alloys.

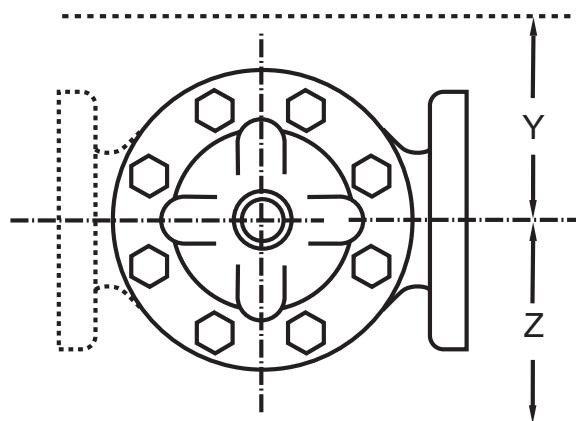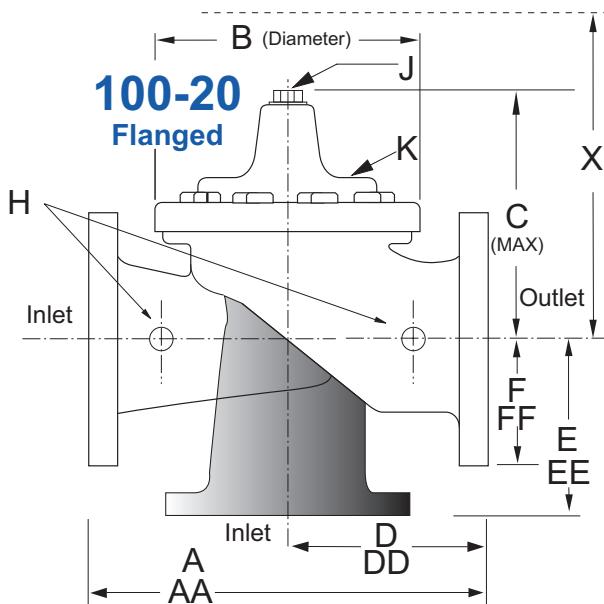

In Inches - For larger sizes, consult Factory




Model 690-48 Dimensions

Valve Size (Inches)	3	4	6	8	10
A 150 ANSI	10.25	13.88	17.75	21.38	26.00
AA 300 ANSI	11.00	14.50	18.62	22.38	27.38
B Diameter	6.62	9.12	11.50	15.75	20.00
C Maximum	7.00	8.62	11.62	15.00	17.88
D 150 ANSI	—	6.94	8.88	10.69	12.75
DD 300 ANSI	—	7.25	9.38	11.19	—
E 150 ANSI	—	5.50	6.75	7.25	8.06
EE 300 ANSI	—	5.81	7.25	7.75	—
F 150 ANSI	3.75	4.50	5.50	6.75	8.00
FF 300 ANSI	4.12	5.00	6.25	7.50	8.75
H NPT Body Tapping	0.375	0.50	0.75	0.75	1.00
J NPT Cover Center Plug	0.50	0.50	0.75	0.75	1.00
K NPT Cover Tapping	0.375	0.50	0.75	0.75	1.00
Stem Travel	0.60	0.80	1.10	1.70	2.30
Approx. Ship Weight (lbs)	45	85	195	330	625
Approx. X Pilot System	13	15	27	30	33
Approx. Y Pilot System	10	11	18	20	22
Approx. Z Pilot System	10	11	18	20	22

See Cla-Val Model # 90-48 for applications requiring a full port valve.

Model 690-48 Metric Dimensions (Uses 100-20 Hytrol Main Valve)

Model 100-20 Reduced Port Hytrol Main Valve

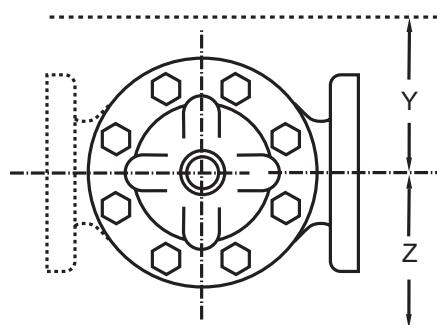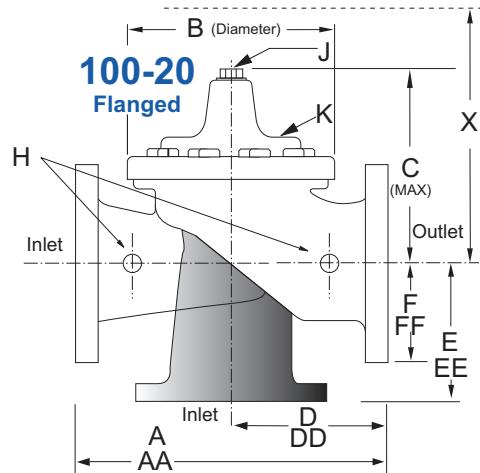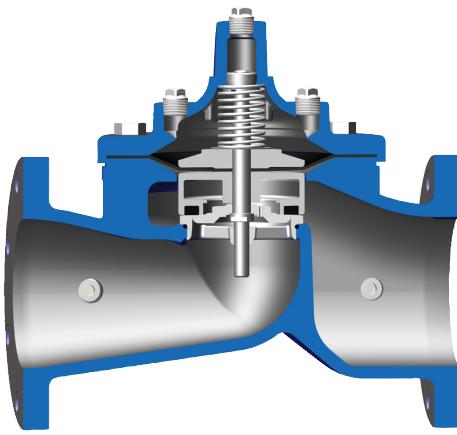

In mm - For larger sizes, consult Factory

Model 90-48 Dimensions

Valve Size (mm)	80	100	150	200	250
A 150 ANSI	260	353	451	543	660
AA 300 ANSI	279	368	473	568	695
B Diameter	168	232	292	400	508
C Maximum	178	219	295	381	454
D 150 ANSI	—	176	226	272	324
DD 300 ANSI	—	184	238	284	—
E 150 ANSI	—	140	171	184	205
EE 300 ANSI	—	148	184	197	—
F 150 ANSI	95	114	140	171	203
FF 300 ANSI	105	127	159	191	222
H NPT Body Tapping	0.375	0.50	0.75	0.75	1.00
J NPT Cover Center Plug	0.50	0.50	0.75	0.75	1.00
K NPT Cover Tapping	0.375	0.50	0.75	0.75	1.00
Stem Travel	15	20	28	43	58
Approx. Ship Weight (kgs)	20	39	89	150	284
Approx. X Pilot System	331	381	686	762	839
Approx. Y Pilot System	254	280	458	508	559
Approx. Z Pilot System	254	280	458	508	559

690-48 Valve Selection		100-20 Pattern: Globe (G), Angle (A), End Connections: Flanged (F) Indicate Available Sizes					
		Inches	3	4	6	8	10
		mm	80	100	150	200	250
Main Valve 100-20		Pattern	G	G, A	G, A	G, A	G
		End Detail	F	F	F	F	F
Suggested Flow (gpm)		Maximum	260	580	1025	2300	4100
		Minimum	1	1	1	1	1
Suggested Flow (Liters/Sec)		Maximum	16	37	65	145	258
		Minimum	.06	.06	.06	.06	.06

100-20 Series is the reduced internal port size version of the 100-01 Series.

For Lower Flows Consult Factory

*Globe Grooved Only

Pilot System Specifications



CRD

Adjustment Ranges

2 to 30 psi
15 to 75 psi
20 to 105 psi
30 to 300 psi*



CRD-L (Bypass)

Adjustment Ranges

15 to 65 psi
25 to 100 psi
80 to 150 psi

Temperature

Water: to 180° F / 82° C

*Consult factory for hot water applications.

Materials

Standard Pilot System Materials

Pilot Control: Low Lead Bronze
Trim: Stainless Steel Type 303
Rubber: Buna-N® Synthetic Rubber

Optional Pilot System Materials

Pilot Systems are available with optional Aluminum, Stainless Steel, or Monel materials.

See Cla-Val Model # 690-48 for applications requiring a reduced port valve.

*Supplied unless otherwise specified Other ranges available, please consult factory

Valve Options



Model X141
Pressure Gauge



Model X101AR
Valve Position Indicator
with Air Release



Model X101D
Valve Position Indicator



Model X43H
Strainer



Stainless Steel Pilot

When Ordering, Please Specify

1. Catalog No. 690-48
2. Valve Size
3. Pattern - Globe or Angle
4. Pressure Class
5. Threaded, Flanged or Grooved
6. Trim Material
7. Adjustment Range
8. Desired Options
9. When Vertically Installed

