CLA-VAL

Model XP2F-D35


DATA LOGGER, FLOW METERING & CONTROLLER PACKAGE

PRODUCT FEATURES

- The Cla-Val Model XP2F-D35 Data Logger, Flow Metering and Valve Controller Package is comprised of the D35 Valve Controller, the e-Lift-35 Valve Position Transmitter, and two X141-PTV Pressure Transmitter assemblies.
- Turns your Cla-Val valve into an all encompassing Instrumentation package that includes Upstream Pressure, Downstream Pressure, Valve Position Instantaneous Flow and Totalized Flow.
- When deployed across the system network the XP2F-D35 package allows for insight into pressure, leakage, flow and system distribution management.
- Inlet Pressure, Outlet Pressure, Valve Position, Flow, and Totalized Flow are retransmitted to Cla-Val Link2Valves Asset Management for data viewing and analysis.

The Cla-Val Model XP2F:

- Is Easily Retrofitted onto Existing Valves
- Has Minimal Upstream/Downstream Straight Pipe Requirements
- Local configuration through Wi-Fi from PC, Tablet or Smartphone
- No Software is Needed
- Easy Field Calibration and Commissioning
- Low Maintenance/Minimal Fluid Contact

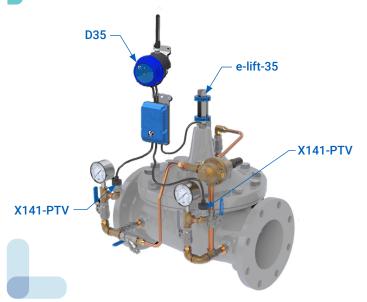



SPECIFICATIONS

Power Requirements: Internal lithium battery

Option: High capacity lithium external

battery

Inputs: 4x Analog

Type: Ratiometric, 0-5V & 0-10V

2x Digital

Type: Dry Contact or Pulse

Outputs: 2x Latching Solenoid

Type: 6VDC

1x Digital

Type: Dry Contact or Pulse

CLA-VAL Company www.cla-val.com info@cla-val.com S-XP2F-D35 (R-09/2024)